


# ALPHAA MEA GENERAL TRADING L.L.C PRIME STONE TRADING L.L.C

Room 104 , First floor, Dubai National Insurance building , Sheikh Zayed Road , Dubai ,U.A.E Contact No :  $\pm 971\text{-}4\text{-}2590091$ 









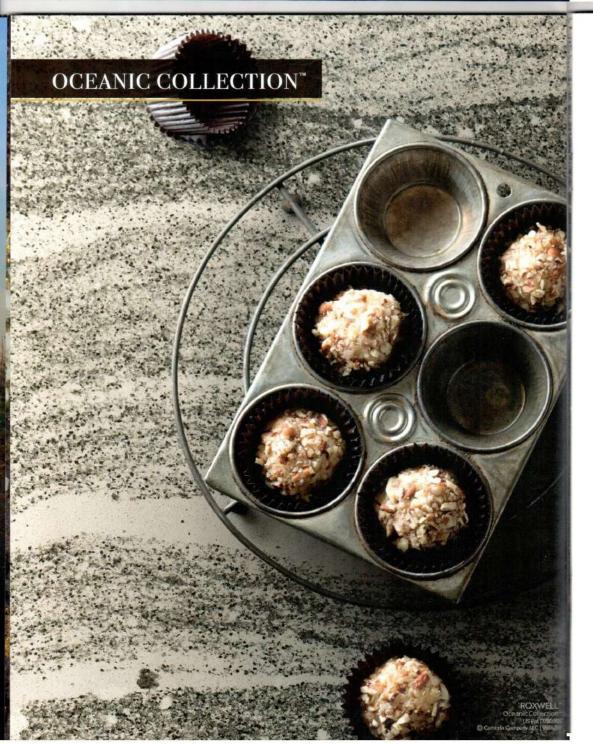



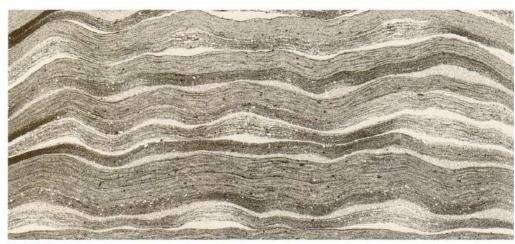

ROXWELL"
Slab View

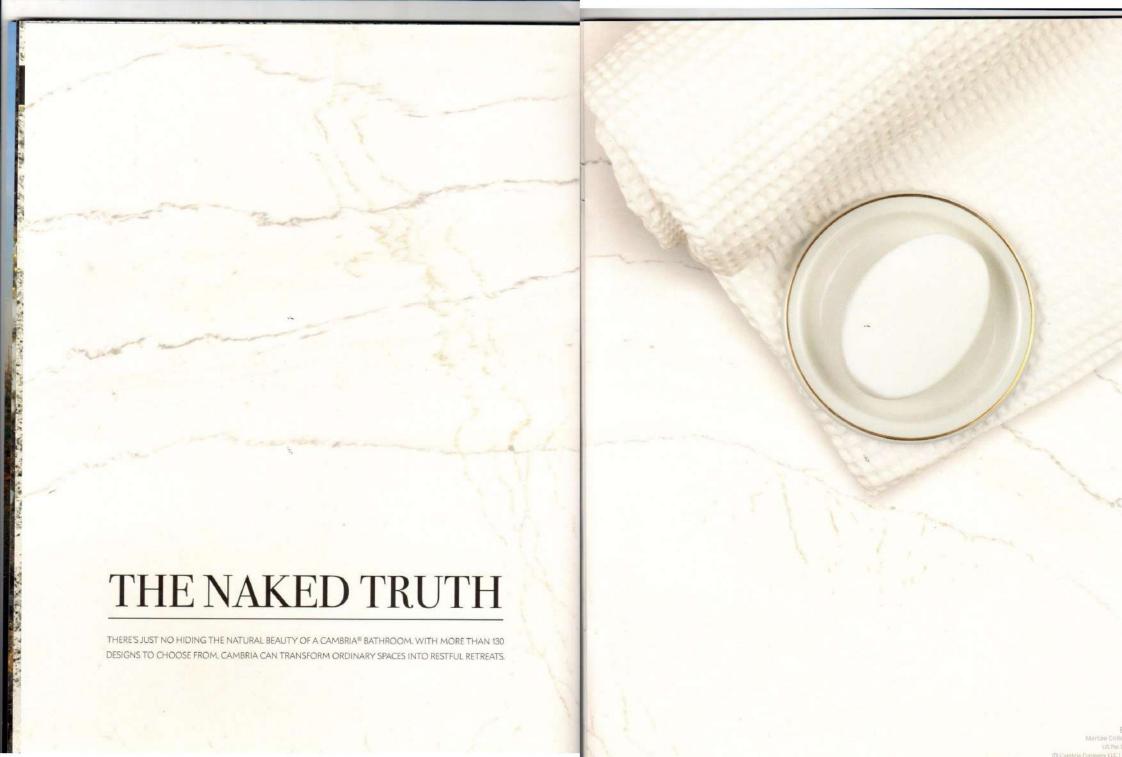

# MARBLE COLLECTION™ BRITTANICCA" Marble Collection BRITTANICCA-

# MARBLE COLLECTION™







CARRICK"



NEW BRIGHTON"














WAVERTON"



FAIRBOURNE"





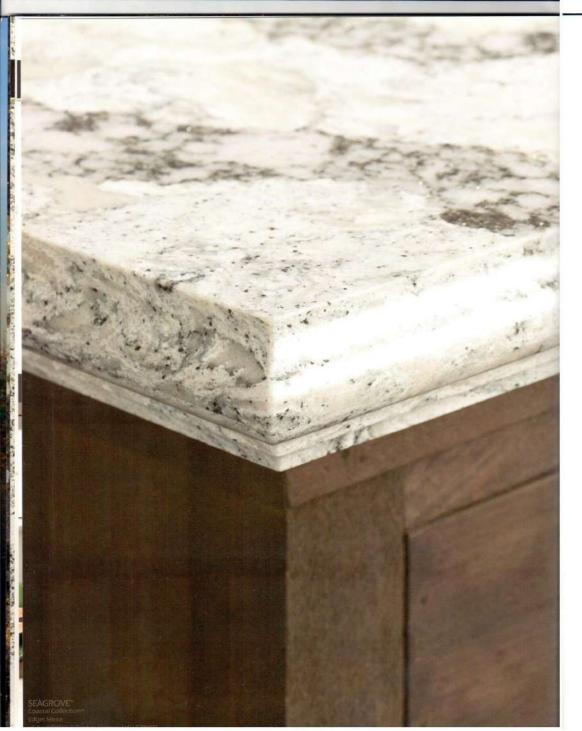

# COASTAL COLLECTION $^{\circ}$



I MARENII I'''



SEAGROVE"



CALLOUANY



ANGDON™

# COASTAL COLLECTION™



HARLECH"



PRINCETOWN"





HELMSLEY"



ELLESMER



# WATERSTONE COLLECTION™




































# WATERSTONE COLLECTION™















### DESERT COLLECTION™

CAMBRIA BLACK



# QUARRY COLLECTION™



# JEWEL COLLECTION™




















# CAMBRIAN COLLECTION™

















# CLASSIC COLLECTION™


















HYDE PARK"



BRECON BROWN"









CARDIGAN RED





BALA BLUE"























# EXTRAORDINARY QUALITY IS BUSINESS AS USUAL

#### PRODUCT PERFORMANCE DATA

TEST	TYPICAL RESULT	METHOD
Gloss, % incident light reflected at 60° on polished finish	47% minimum	Glossmeter
Density -	2.4 g/cm <sup>2</sup>	Hydrostatic scale
Moisture Absorption	Negligible	ASTM C-97
Modulus of Rupture	6,800 psi	ASTM C-99
Compressive Strength	24,750 ps	ASTM C-170
Abrasion Resistance	223	ASTM C-501
Bond Strength	205 psi	ASTM C-482
Thermal Shock	Passes-5 cycles	ASTM C-484
Coefficient of Thermal Expansion	1.2x10   inch/°F	ASTM C-531
Breaking Strength of Tile	3.661 lbf	ASTM C-648
Resistance to Freeze Thaw Cycling	Unaffected-15 cycles	ASTM C-1026
Wet Dynamic Coefficient of Friction	0.34	ANSI A137.1
Dry Dynamic Coefficient of Friction	0.72	ANSI A137/1
Surface Burning Characteristics	17 (Class A/1 Rating)	ASTM E-84
Smoke Density	Flaming-196 / Non-flaming-69	ASTM E-662
Cigarette Burn	Unaffected	ANSI Z-124.6
Stain Resistance	Unaffected	ANSI Z-124.6
THE RESIDENCE OF THE PARTY OF T		



INDUSTRY-LEADING INNOVATION, DEDICATED AMERICAN CRAFTSMANSHIP, AND METICULOUS ATTENTION TO THE SMALLEST DETAILS ENABLE US TO CREATE MORE THAN 130 STUNNING NATURAL STONE DESIGNS UNLIKE ANYTHING ELSE IN THE WORLD.

#### CERTIFIED PERFORMANCE

Cambria not only makes the most beautiful natural stone surfaces in the world, we also make sure they're certified safe for homes and businesses, food preparation, and our environment.









Declare.

#### NOMINAL SLAB SIZE

Jumbo: 335x166cm Standard: 310x141cm

#### SLAB THICKNESS 1cm, 2cm, 3cm

em :

#### SLAB WEIGHT

1cm = 29.3 kg/m<sup>2</sup> 2cm = 48.8 kg/m<sup>2</sup>

 $3cm = 73.2 \text{ kg/m}^2$ 

#### DISCOVER A WORLD OF INSPIRATION

With the Cambria app for iPhone or iPad, you can browse through all our designs by tone, texture, characteristics, color, or collection, and save your favorites. In addition, with the app for iPad you can also see any design installed in designer kitchen and bath settings.

AT YOUR FINGERTIPS

# why CAMBRIA?

#### QUARTZ - THE NATURAL CHOICE

- Quartz is one of the most common minerals on Earth.
- Only the clearest white crystals are used to add dimension and make a difference you can clearly see.

#### SUPERIOR PERFORMANCE

- Quartz is rated 7 on the Mohs scale of hardness (diamond is a 10) making it the most scratch-resistant and durable surface available.
- Cambria® is 93% pure quartz. Granite contains approximately 40-60% quartz, along with more porous, weaker minerals, making it more susceptible to damage.
- Has flexural strength of 6,800 PSI which makes it twice as strong as granite and more than three times stronger than marble.

#### EASY-CARE CONVENIENCE

- · Never needs sealing, polishing, or reconditioning.
- · Cleans up with just warm water.

#### NONPOROUS/NSF RATED

- · Staining liquids and harmful bacteria are never absorbed.
- Certified by NSF International as safe for use as a food preparation surface.

#### **ENVIRONMENTALLY FRIENDLY**

- Certified GREENGUARD Gold as a low-emitting product for indoor air quality and is suitable for any environment.
- Dedicated to responsible mining, and committed to recycling 100% of the water used during processing, circulating 1,700 gallons per minute.
- Recycled water from on-site storm ponds is used to irrigate production facility grounds.

#### AMERICAN CRAFTSMANSHIP

- Handcrafted from start to finish in Minnesota to ensure the highest quality all the way to customers' homes.
- State-of-the-art technology used in production ensures flawless design without compromise.
- Industry-leading innovation enables groundbreaking new designs unlike anything else in the world.

#### EXPERIENCE AND SUPPORT

- Cambria provides education for fabricators and installers at Cambria<sup>®</sup> University.<sup>™</sup>
- · Retail and product display tools available.
- · Full-service marketing, including social media and advertising.
- Local sales support and trade events provided.